


MAYSER®

Polymer Electric



Product Information

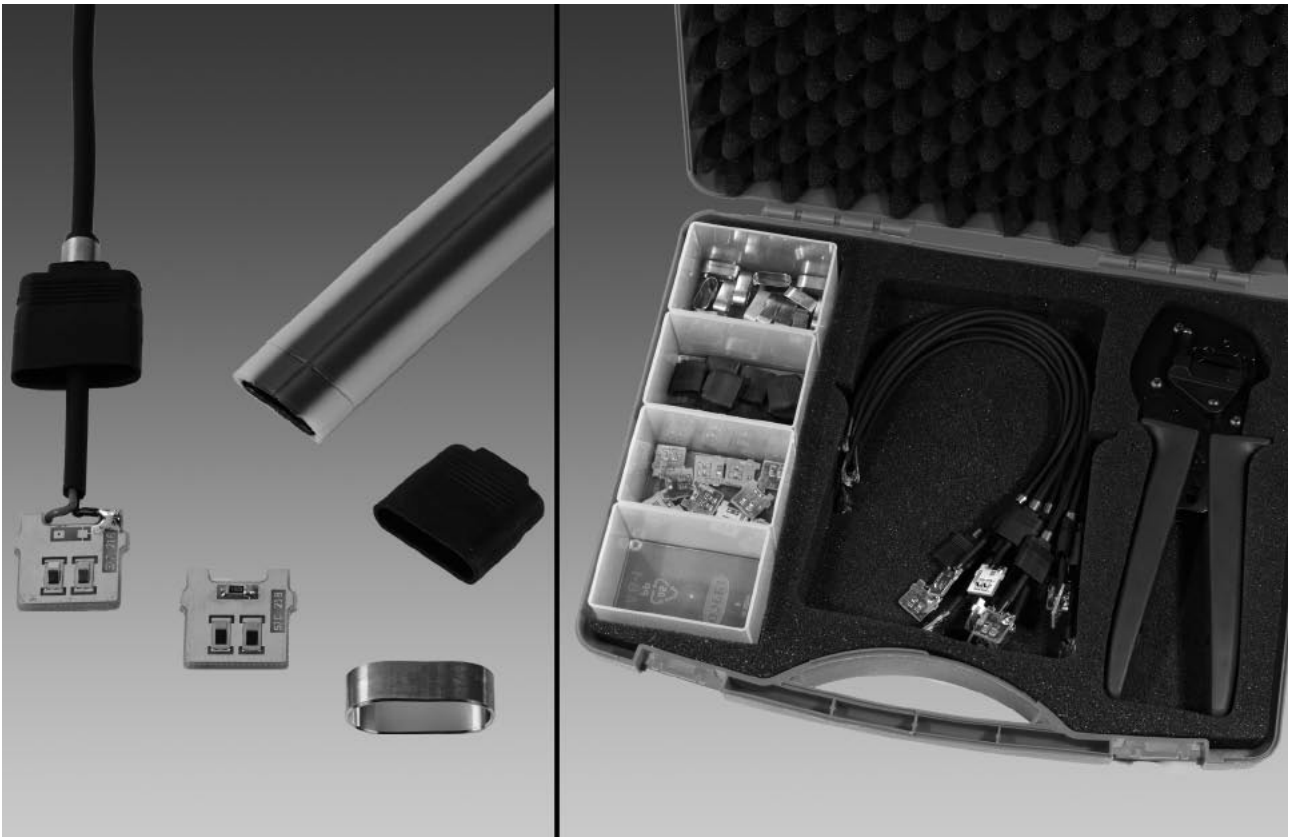

DIY SE 1 TPE spring contact

MAYSER® GmbH & Co. KG
Polymer Electric
Örlinger Straße 1–3
89073 Ulm
GERMANY
Tel. +49 731 2061-0
Fax +49 731 2061-222
<http://www.mayser.com>
E-Mail: info.ulm@mayser.com

Materials list

Part no.	Designation	PE
7500270	Contact tube SE 1 TPE, 18 mm	50 m
1004064	Spring contact PCB with 0.4 m cable incl. end cap and sealing ring (round)	10 pce.
1004065	Spring contact PCB with 2.5 m cable incl. end cap and sealing ring (round)	10 pce.
1004063	Spring contact PCB with resistor 8k2	10 pce.
7501212	End cap for resistor end	10 pce.
1002606	Sealing ring (oval)	20 pce.
7501927	Tongs with tool insert for sealing process	1 pc.
7501928	Service case with tongs	1 pc.
7501800	Assembly instructions, German	1 pc.
7501801	Assembly instructions, English	1 pc.

Application

The complete Safety Element SE 1 TPE is inserted into a suitable rubber profile and is suitable for the rubber profiles GP 38, GP 58 and GP 68.

If another rubber profile is used, it is to be ensured that the rubber profile does not exert any pressure on the contact tube in the unloaded state.

If the Safety Element SE 1 TPE is used without a rubber profile, secure attachment is to be ensured.

Resistances

Physical resistance

Safety Element SE 1	TPE
Degree of protection (IEC 60529)	IP65
Hardness as per Shore A	55 ±5

Chemical resistance

The Safety Element is resistant against normal chemical influences such as diluted acids and alkalis as well as alcohol over an exposure period of 24 hrs.

The information in the table are results of tests carried out in our laboratory to the best of our knowledge and belief. The suitability of our products for your special area of application must always be verified with your own practical tests.

Safety Element SE 1	TPE
Acetone	-
Formic acid	-
Armor All	+
Car shampoo	+
Petrol	-
Brake fluid	+
Buraton	+
Butanol	-
Sodium hypochlorite	-
Disinfectant	+
Diesel	-
Acetic acid 10 %	-
Ethanol	+
Ethyl acetate	-
Ethylene glycol	+
Greases	±
Anti-frost agent	+
Skin cream	+
Icidine	+
Incidin	+
Incidin plus	+
Cooling lubricant	-
Plastic cleaner	+
Lyso FD 10	+
Metal working oil	-
Microbac	+
Microbac forte	+
Minutil	+
Saline solution 5 %	+
White spirit (ethyl alcohol)	+
Terralin	+
UV-resistance	+
Centring oil	-

Explanation of symbols:

+ = resistant

± = partially resistant

- = not resistant


Note:

Tests are carried out at room temperature (+23 °C).

Technical data

Safety Element SE 1 TPE cut-to-size
with resistor for 2-wire technology or
without resistor for 4-wire technology.

Bend radii:

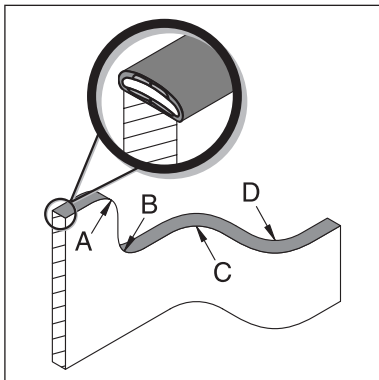

Switching characteristics at $v_{\text{test}} = 50 \text{ mm/s}$		
Switching operations	$> 1 \times 10^5$	
Actuating force	+23 °C	-25 °C
Test piece (rod) Ø 4 mm	$< 20 \text{ N}$	$< 30 \text{ N}$
Test piece (rod) Ø 200 mm	$< 30 \text{ N}$	$< 50 \text{ N}$
Switch travel		
Test piece (cylinder) Ø 80 mm	$< 3.0 \text{ mm}$	
Actuation angle		
Test piece (cylinder) Ø 80 mm	$< 50^\circ$	
Mechanical operating conditions		
Safety Element length	min. 100 mm / max. 50 m	
Bend radii, minimum	A / B / C / D	
A / B / C / D	350 / – / – / – mm	
Tensile load, cable	max. 60 N	
Protection class as per EN 60529	IP65	
Operating temperature	-25 °C to +80 °C	
short-term	-40 °C to +100 °C	
Behaviour in fire		
as per DIN 75200	ca. 40 mm/min	
also complies with	limit values of the StVZO, TA 29	
Electrical operating conditions		
Terminal resistance 8k2	$\pm 3\%$	
Output	max. 250 mW	
Contact transition resistance	$< 400 \text{ Ohm}$ (per sensor)	
Several Safety Elements	5 in series max.	
Electrical rating		
Voltage	max. 24 V DC	
Current (min./max.)	1 mA / 30 mA	
Connection cable	Ø 3.7 mm TPE 2x 0.22 mm ²	
Chemical resistance (see page 3)		
	The Safety Element is resistant to normal chemical influences over a period of exposure of 24 hours (see p. 3).	
Dimensional tolerances		
Length as per	ISO 3302 L2	
Profile section as per	ISO 3302 E2	